

SIEMENS



Answers for Energy

# Industrial Gas Turbines

The comprehensive product range from 5 to 50 megawatts



[www.siemens.com/energy](http://www.siemens.com/energy)

# Meeting your needs, driving your profitability: Industrial gas turbines from Siemens

**A reliable, environmentally friendly and cost-effective power supply is a key driver for a profitable and sustainable business. Whether you are an oil and gas company, an EPC or architect engineer, a power producer or a power user, we are able to offer gas turbine based solutions which will exactly meet your needs and increase your profitability.**

Our industrial gas turbine range comprises nine models with capacities from 5 to 50MW, designed with your profitability in mind. Whatever the application, our gas turbines meet the requirements for efficiency, reliability and environmental compatibility, giving low life-cycle costs and the best possible return on investment.

Whether for the production of power and heat, or the transport of oil and gas, our proven turbines are among the most practical and economical prime movers.

Dry Low Emission (DLE) combustion is standard throughout the product range, to minimize NO<sub>x</sub> emissions and ensure that our turbines comply with both global and regional emission regulations. Our leading-edge turbine technology offers broad fuel flexibility and outstanding efficiencies for economic fuel consumption and low CO<sub>2</sub> emissions.

## **Our solutions include:**

- gas turbine generating sets
- gas turbines for power generation and mechanical drive applications
- gas turbines for marine applications
- full range of extended scope solutions for the oil and gas industry
- full range of extended scope solutions for power producers and users
- power plants
- lifetime service and support packages

# Industrial gas turbines

The comprehensive Siemens product range from 5 to 50 megawatts




## SGT-100

### Power generation 5.40MW(e)

- Fuel: Natural gas\*
- Frequency: 50/60Hz
- Electrical efficiency: 31.0%
- Heat rate: 11,613kJ/kWh (11,008Btu/kWh)
- Turbine speed: 17,384rpm
- Compressor pressure ratio: 15.6:1
- Exhaust gas flow: 20.6kg/s (45.4lb/s)
- Exhaust temperature: 531°C (988°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 25ppmV

### Mechanical drive 5.70MW (7,640bhp)

- Fuel: Natural gas\*
- Efficiency: 32.9%
- Heat rate: 10,948kJ/kWh (7,738Btu/bhph)
- Turbine speed: 13,000rpm
- Compressor pressure ratio: 14.9:1
- Exhaust gas flow: 19.7kg/s (43.4lb/s)
- Exhaust temperature: 543°C (1,009°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 25ppmV

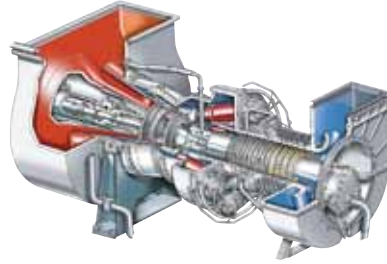


## SGT-200

### Power generation 6.75MW(e)

- Fuel: Natural gas\*
- Frequency: 50/60Hz
- Electrical efficiency: 31.5%
- Heat rate: 11,418kJ/kWh (10,823Btu/kWh)
- Turbine speed: 11,053rpm
- Compressor pressure ratio: 12.2:1
- Exhaust gas flow: 29.3kg/s (64.5lb/s)
- Exhaust temperature: 466°C (871°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 25ppmV

### Mechanical drive 7.68MW (10,300bhp)

- Fuel: Natural gas\*
- Efficiency: 33.0%
- Heat rate: 10,906kJ/kWh (7,708Btu/bhph)
- Turbine speed: 10,950rpm
- Compressor pressure ratio: 12.3:1
- Exhaust gas flow: 29.5kg/s (65.0lb/s)
- Exhaust temperature: 489°C (912°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV

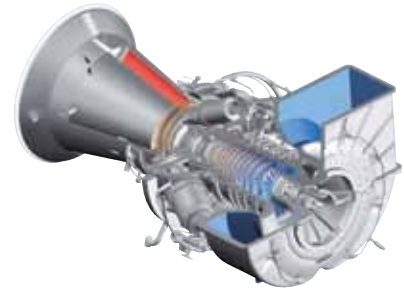

## SGT-300

### Power generation 7.90MW(e)


- Fuel: Natural gas\*
- Frequency: 50/60Hz
- Electrical efficiency: 30.6%
- Heat rate: 11,773kJ/kWh (11,158Btu/kWh)
- Turbine speed: 14,010rpm
- Compressor pressure ratio: 13.7:1
- Exhaust gas flow: 30.2kg/s (66.6lb/s)
- Exhaust temperature: 542°C (1,008°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV

### Mechanical drive 8.2MW (11,000bhp)

- Fuel: Natural gas\*
- Efficiency: 34.6%
- Heat rate: 10,400kJ/kWh (7,350 Btu/bhph)
- Turbine speed: 11,500rpm
- Compressor pressure ratio: 13.3:1
- Exhaust gas flow: 29.0kg/s (63.9lb/s)
- Exhaust temperature: 498°C (928°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV

\*No intake or exhaust loss; other gaseous, liquid and/or dual fuel options available





### SGT-400

#### Power generation 12.90MW(e)

- Fuel: Natural gas\*
- Frequency: 50/60Hz
- Electrical efficiency: 34.8%
- Heat rate: 10,355kJ/kWh (9,815Btu/kWh)
- Turbine speed: 9,500rpm
- Compressor pressure ratio: 16.8:1
- Exhaust gas flow: 39.4kg/s (86.8lb/s)
- Exhaust temperature: 555°C (1,031°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV

*Also available as 14.40MW(e)*

#### Mechanical drive 13.40MW (18,000bhp)

- Fuel: Natural gas\*
- Efficiency: 36.2%
- Heat rate: 9,943kJ/kWh (7,028Btu/bhph)
- Turbine speed: 9,500rpm
- Compressor pressure ratio: 16.8:1
- Exhaust gas flow: 39.4kg/s (86.8lb/s)
- Exhaust temperature: 555°C (1,031°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV

*Also available as 15.00MW (20,100bhp)*




### SGT-500

#### Power generation 19.10MW(e)

- Fuel: Natural gas\*
- Frequency: 50/60Hz
- Electrical efficiency: 33.8%
- Heat rate: 10,664kJ/kWh (10,107Btu/kWh)
- Turbine speed: 3,600rpm
- Compressor pressure ratio: 13:1
- Exhaust gas flow: 97.9kg/s (215.9lb/s)
- Exhaust temperature: 369°C (697°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 42ppmV

#### Mechanical drive 19.52MW (26,177bhp)

- Fuel: Natural gas\*
- Efficiency: 34.5%
- Heat rate: 10,432kJ/kWh (7,373Btu/bhph)
- Turbine speed: 3,450rpm
- Compressor pressure ratio: 13:1
- Exhaust gas flow: 97.9kg/s (215.9lb/s)
- Exhaust temperature: 369°C (697°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 42ppmV

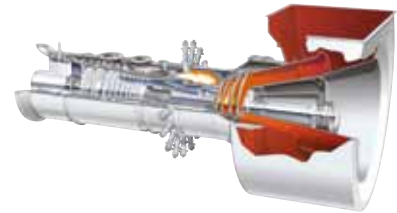

### SGT-600

#### Power generation 24.77MW(e)


- Fuel: Natural gas\*
- Frequency: 50/60Hz
- Electrical efficiency: 34.2%
- Heat rate: 10,533kJ/kWh (9,983Btu/kWh)
- Turbine speed: 7,700rpm
- Compressor pressure ratio: 14:1
- Exhaust gas flow: 80.4kg/s (177.3lb/s)
- Exhaust temperature: 543°C (1,009°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 25ppmV

#### Mechanical drive 25.40MW (34,100bhp)

- Fuel: Natural gas\*
- Efficiency: 35.1%
- Heat rate: 10,258kJ/kWh (7,250Btu/bhph)
- Turbine speed: 7,700rpm
- Compressor pressure ratio: 14:1
- Exhaust gas flow: 80.4kg/s (177.3lb/s)
- Exhaust temperature: 543°C (1,009°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 25ppmV

*\*No intake or exhaust loss; other gaseous, liquid and/or dual fuel options available*



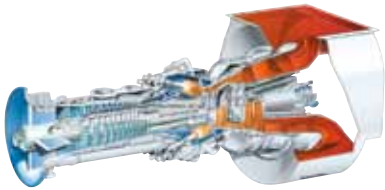


### SGT-700

#### Power generation 31.21MW(e)

- Fuel: Natural gas\*
- Frequency: 50/60Hz
- Electrical efficiency: 36.4%
- Heat rate: 9,882kJ/kWh (9,367Btu/kWh)
- Turbine speed: 6,500rpm
- Compressor pressure ratio: 18.6:1
- Exhaust gas flow: 94kg/s (208lb/s)
- Exhaust temperature: 528°C (983°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV

#### Mechanical drive 32.04MW (42,966bhp)

- Fuel: Natural gas\*
- Efficiency: 37.4%
- Heat rate: 9,629kJ/kWh (6,806Btu/bhph)
- Turbine speed: 6,500rpm
- Compressor pressure ratio: 18.6:1
- Exhaust gas flow: 94kg/s (207lb/s)
- Exhaust temperature: 528°C (983°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV

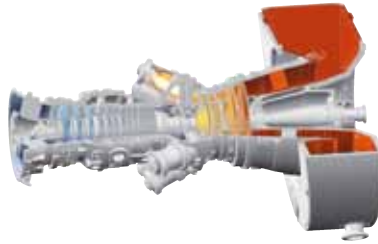

### SGT-750

#### Power generation 35.93MW(e)

- Fuel: Natural gas\*
- Frequency: 50/60Hz
- Electrical efficiency: 38.7%
- Heat rate: 9,296kJ/kWh (8,811Btu/kWh)
- Turbine speed: 6,100rpm
- Compressor pressure ratio: 23.8:1
- Exhaust gas flow: 113.3kg/s (249.8lb/s)
- Exhaust temperature: 462°C (864°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV

#### Mechanical drive 37.11MW (49,765bhp)

- Fuel: Natural gas\*
- Efficiency: 40.0%
- Heat rate: 9,002kJ/kWh (6,362Btu/bhph)
- Turbine speed: 3,050–6,405rpm
- Compressor pressure ratio: 23.8:1
- Exhaust gas flow: 113.3kg/s (249.8lb/s)
- Exhaust temperature: 462°C (864°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV



### SGT-800

#### Power generation 47.00MW(e)

- Fuel: Natural gas\*
- Frequency: 50/60Hz
- Electrical efficiency: 37.5%
- Heat rate: 9,597kJ/kWh (9,096Btu/kWh)
- Turbine speed: 6,608rpm
- Compressor pressure ratio: 19:1
- Exhaust gas flow: 131.5kg/s (289.9lb/s)
- Exhaust temperature: 544°C (1,011°F)
- NO<sub>x</sub> emissions (with DLE, corrected to 15% O<sub>2</sub> dry): ≤ 15ppmV

*Also available as 50.50MW(e)*

*\*No intake or exhaust loss; other gaseous, liquid and/or dual fuel options available*







Wingas compressor station, Eischleben, Germany: Two Siemens compressor trains, each powered by a 30MW SGT-700 gas turbine, boosting the pipeline pressure for Natural gas\* transport.



Siemens gas turbine package: A 5.25MW(e) industrial gas turbine cogeneration package, including an SGT-100 gas turbine, generator and auxiliaries, providing heat and power.



Göteborg Energi AB, Rya, Gothenburg: Three 45MW(e) SGT-800 gas turbines at the combined heat and power plant provide electricity and heating to the city of Gothenburg.



Sasol Technology (Pty) Ltd, South Africa: The 13.4MW SGT-400 gas turbine is the key component to the two pipeline compressor sets installed at the Komatipoort compressor station.

## Power generation and industrial applications

### Independent power producers, utilities and municipalities:

- Simple cycle and combined cycle power plants for base load, standby power and peak lopping
- Cogeneration for industrial plants with high heat load and district heating schemes

### Power users:

- Chemical plants and pharmaceuticals
- Food and beverage plants
- Automotive plants, mining, heavy industry
- Pulp and paper, textiles
- Hospitals, universities and other building complexes
- Marine propulsion, other process and manufacturing industries

## Oil and gas industry

### Upstream – onshore and offshore production, fixed and floating:

- Prime movers for water injection and crude oil pumping, gas lift, gas/oil separation
- Well depletion/wellhead boosting, natural gas and sour gas injection
- Gas gathering and export gas compression, refrigeration compression for gas-processing plant
- Power generation and power supply

### Midstream – pipelines, storage and LNG:

- Gas turbine driven compressors and pumps, e.g. for high-pressure gas transmission pipelines and oil pumping
- Power generation and refrigerant compression for liquefied Natural gas\* (LNG)

### Downstream – refineries, petrochemicals, GTL:

- Gas to liquids (GTL) – power generation
- Refinery – power generation

Published by and copyright © 2012:

Siemens AG  
Energy Sector  
Freyeslebenstrasse 1  
91058 Erlangen, Germany

Siemens AG  
Energy Sector  
Oil & Gas  
Wolfgang-Reuter-Platz  
47053 Duisburg, Germany

Siemens Energy Inc.  
10730 Telge Road  
Houston, Texas 77095, USA

Siemens Industrial Turbomachinery Ltd.  
Ruston House, Waterside South  
Lincoln LN5 7FD  
United Kingdom

For more information, please contact  
our Customer Support Center.

Phone: +49 180 524 70 00

Fax: +49 180 524 24 71

(Charges depending on provider)

E-mail: [support.energy@siemens.com](mailto:support.energy@siemens.com)

Oil & Gas Division

Order No. E50001-G430-A100-V5-4A00

Printed in Germany

Dispo 34806, bdk P120047, c4bs 7447, P WS 03122.5

Printed on elementary chlorine-free bleached paper.

All rights reserved.

Trademarks mentioned in this document  
are the property of Siemens AG, its affiliates,  
or their respective owners.

Subject to change without prior notice.

The information in this document contains  
general descriptions of the technical options  
available, which may not apply in all cases.  
The required technical options should therefore  
be specified in the contact.